

Power a clean future.

Product Sheet

NexBlue Zen

(Smart Meter)


Sweden Office: +46 738981965 Sven Rinmans Gata 6, 112 37 Stockholm, Sweden


Norway Office: +47 406 01 015 Grenseveien 21, 4313 Sandnes, Norway

General Inquiry Email: info@nexblue.com

NexBlue Zen (Smart meter)

Load Balancer for Smart Meter Scenarios

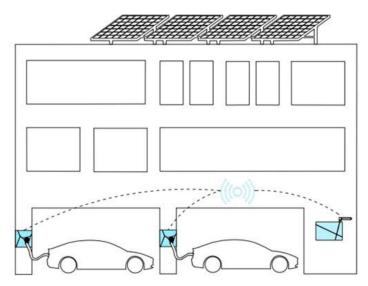

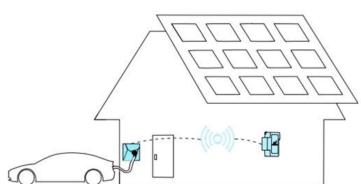

Compact and highly compatible

- ✓ Supporting ALL Nordic smart meters with HAN/P1 port and Kamstrup OMNIPOWER® meters (no extra module needed)
- $m \prime$ No need to occupy the DIN rail in the crowded $m \prime$ fuse cabinet
- Nexus RF / Wi-Fi / Bluetooth

Effortless installation

- ✓ No disassembly required.
- No additional APP required.
- No extra power supply required
- Plug & Play connection to the smart meter
- Easily snap it to the fuse cabinet with the magnetic backing



Hassle-free smart charging

- ✓ Uninterrupted charging with DLB even without network
- ✓ High penetrability through walls with Nexus RF (Radio Frequency)
- ✓ Inter-circuit load balancing available through the Cloud in one Location
- ✓ Future-proof for communication with energy storage and PV panels




Optimizing energy use


- Efficiently monitor and optimize energy use via WiFi
- ✓ Turn on Solar Surplus Mode to access free, Eco-friendly charging with solar panels
- ✓ Save cost by setting up household electricity consumption limits during peak hours
- ✓ Grasp real-time data from smart meter, transmit to Cloud and chargers



Dimensions







Technical Information

General

Model: SMBNA Dimension (mm): H: 60 x W: 60 x D: 26

Weight: 57 g Color: Black Rated power: 0.1-1.7W

Power supply: 3.8-38 Vdc

Terminals: RJ45 terminal, Backup Power

Supply terminal

Mounting: Magnetic backing

Warranty: 3 years

Cabling

HAN Port: RJ45 to RJ45 P1 Port: RJ45 to RJ12

KM smart meter: RJ45 to 6-pin male

connector

Operating conditions

Operating temperature:

-25°C to +50°C

Ingress protection: IP30 Relative humidity: 0 - 90%

Altitude: 0-2000 m Indoor use: Yes

Connectivity

Wi-Fi: 2.4 GHz 802.11b/g/n

Bluetooth: BLE 4.2

Nexus RF

Regulations:

EU Type Examination Certificate

(Module B) confirming compliant with:

Article 3.1.a: Health and Safety

Article 3.1.b: EMC

Article 3.2: Effectively uses and efficient use

of radio spectrum